


Braeburn®

5020

Single Stage Conventional or Heat Pump Programmable or Non-Programmable Thermostat

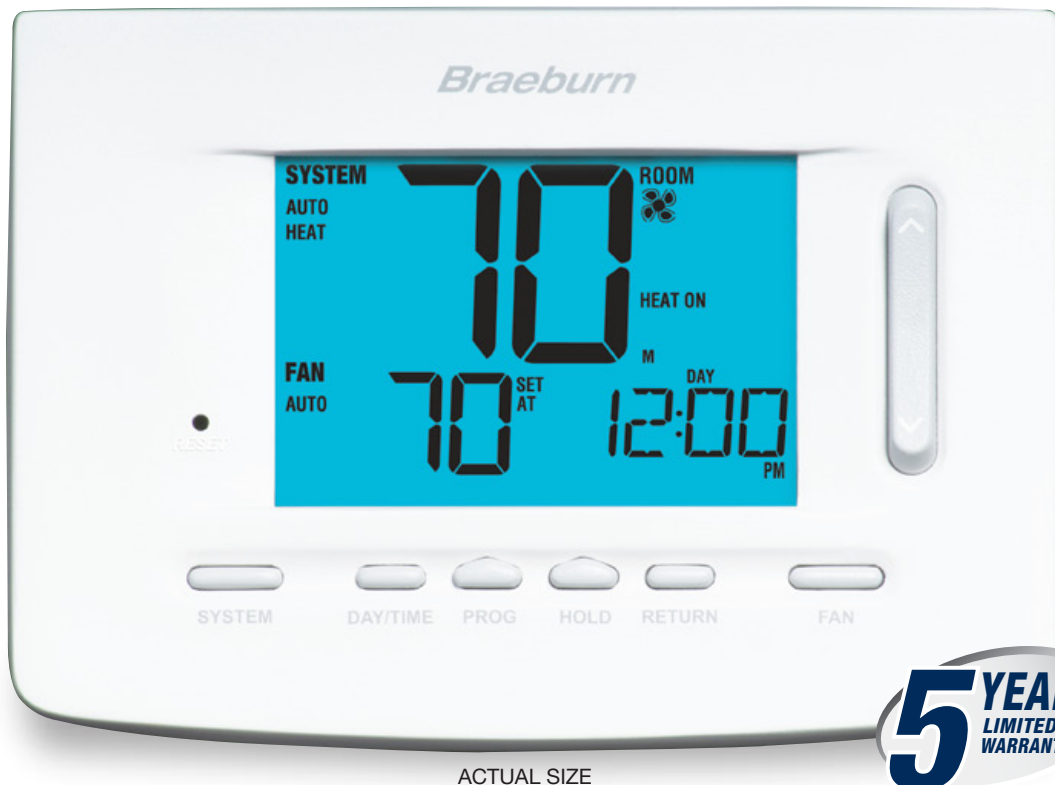

ACTUAL SIZE

Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 5 Sq. In. Display with Bright Blue Backlight
- Auto or Manual Changeover
- SpeedBar® Multi-Function Button
- Adjustable Temperature Limits
- Indoor or Outdoor Remote Sensing
- SpeedSet™ Programming Mode
- Meets Energy Aware® Guidelines*
- Hardwire or Battery Powered
- Multi-Level Keypad Lockout
- Separate User and Installer Reset Buttons
- Programmable Fan with On or Auto Modes
- Adaptive Recovery Mode (ARM™)
- Temporary Override Limits
- Residential and Commercial Modes
- Compatible with 2 or 3 Wire Hydronic Zone Systems
- English / Spanish Packaging and Instruction Card


PREMIER SERIES

FREE Contractor Branding! Visit braeburnonline.com

*As a licensee in the Energy Aware Programmable Thermostat Program, Braeburn Systems LLC has determined that this product meets the NEMA Energy Aware efficiency specifications for programmable thermostats. Visit www.getenergyaware.com for more information.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

Terminal Designations

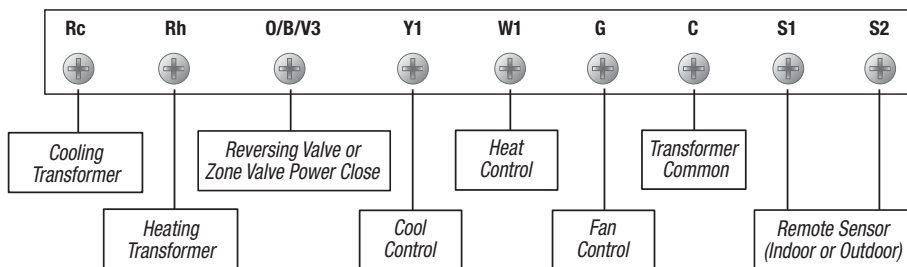

Architectural Specifications

The universal auto changeover thermostat shall be a Braeburn® model number 5020, 3.86" high x 5.11" wide x 1.42" deep, powered with either 24 Volt AC or with two "AA" Alkaline batteries (3.0 Volt DC). In the event of a power failure, the unit shall retain all user, installer and program settings. The thermostat shall be compatible with low voltage single stage gas, oil, or electric heating or cooling systems, and single stage heat pump systems. Also compatible with 250mv – 750mv millivolt heating only systems and 2 or 3 wire hydronic zone systems. The thermostat shall have a bright blue backlight display, SpeedBar®, separate sub-base and multi-level keypad lockout. Temperature control range shall be between 45° and 90° F (7° and 32° C), accuracy of +/- 1° F (+/- .5° C) and operating humidity range between 5% and 95% relative humidity. The thermostat shall include separate installer and user setup modes, permanent non-volatile memory to retain user settings, filter, UV and humidifier pad check monitor, adaptive recovery mode (ARM™), programmable fan mode, residual cooling fan delay and indoor or outdoor remote sensor capability. A front reset button will return user settings to default values when pressed. Meets California Title 24 and Energy Aware® Guidelines.

Product Specifications

Dimensions:	3.86" x 5.11" x 1.42"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 3 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	Single stage gas, oil or electric systems Single stage heat pump systems 250mv – 750mv millivolt heating systems
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Temperature Differential:	.5°, 1°, or 2° F (0.2°, 0.5°, or 1° C)
Storage Temperature:	14° to 140° F (-10° to 60° C)
Operating Humidity:	5% to 95% Relative Humidity
Terminations:	Rc, Rh, O/B/V3, Y1, W1, G, C, S1, S2

Shipping Information

INDIVIDUAL CARTON	MASTER CARTON
Dimensions: 5.0" x 6.3" x 2.0"	Quantity: 6
Weight: .92 lbs.	Dimensions: 6.4" x 13" x 5.6"
	Cubic Feet: .27
	Weight: 6 lbs.

Braeburn 5020 Replaces*

Honeywell®	TH6110
White-Rodgers®	1F85-0471, 1F87-361, 1F97-0671
	<small>*Verify specific application requirements. All trademarks are the property of their respective owners.</small>

Accessories

2950 Universal Wall Plate (6.5" x 6.5" x .125")	5390 Remote Indoor Sensor
5970 Universal Thermostat Guard	5490 Remote Outdoor Sensor

FREE Contractor Branding Available!

Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).

Date: _____
 Job Name: _____
 Location: _____
 Contractor: _____

Engineer: _____
 Model No.: _____
 Submitted By: _____
 Submitted For Approval: _____ Record: _____