

Braeburn®

7320

Up to 3 Heat / 2 Cool Heat Pump
Up to 2 Heat / 2 Cool Conventional
Smart Wi-Fi Universal Thermostat

BlueLink™
smart connect



Phone not included.

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 6.5 sq. in. Easy-Read Touchscreen
- Bright Blue Backlight Display
- Auto or Manual Changeover
- Residential or Commercial Modes
- Adjustable Temperature Limits
- Wireless or Wired Remote Sensing
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered*
- Humidification and Dehumidification Control with 7330 Wireless Sensor
- Auxiliary "A" Terminal for Economizer, Fresh Air or Output Control

FREE Contractor Branding!
Visit braeburnonline.com

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- QuickCopy™ Allows User to Duplicate Program and Configuration to Other Thermostats
- BlueLink SmartData™ Energy Report Capability (Fall 2015)
- Monitor and Control Multiple Thermostats
- View Outdoor Temperature**
- Adjust and View Indoor Humidity**
- Easy Access Dealer Information
- Help Screens Guide User Through Application



www.bluelinksmartconnect.com


*Common "C" wire required to use Wi-Fi. **Optional sensors required.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink Smart Connect™ Application Screens


Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.

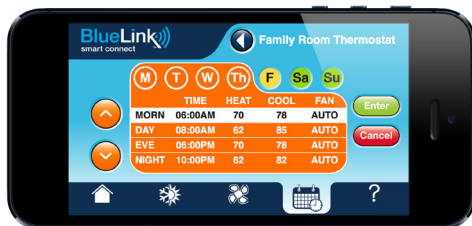

BlueLink SmartData™ Energy Reports (Available Fall 2015)

Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.

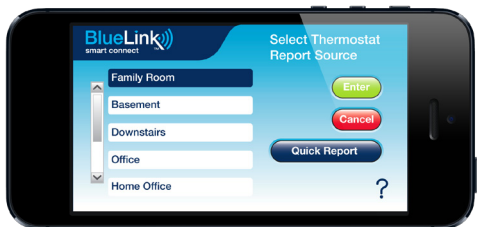

QuickCopy™ Feature

Service and Temperature Alerts

Service Dealer Information



Product Specifications

Dimensions:	3.94" x 5.56" x 1.19"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 6 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC (required for Wi-Fi)
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
Wi-Fi Communication:	802.11 (requires 24 VAC with C wire)
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	Rh, Rc, C, W2/AUX, W1/E, L, A, O/B, G, Y2, Y1, K, S2, S1

Shipping Information

INDIVIDUAL CARTON	MASTER CARTON
Dimensions: 5.0" x 6.0" x 2.5"	Quantity: 3
Weight: 1.2 lbs.	Dimensions: 7.25" x 6.25" x 5.4"
	Cubic Feet: .14
	Weight: 3.85 lbs.

Braeburn 7320 Replaces*

Honeywell® TH8320WF, TH6320WF, TH9320WF, TH8732WF	Pro1® T855i
Emerson® 1F86U-42WF	Nest® T100577, T200577
	Venstar® T5800**, T5900**

*Verify specific application requirements. All trademarks are the property of their respective owners.
**Requires separate Wi-Fi key.

Accessories

7330 Wireless Remote Humidity Sensor	2950 Universal Wall Plate (6.5" x 6.5" x .125")
7340 Share-a-Wire™ Module	5390 Wired Remote Indoor Sensor
7390 Wireless Remote Indoor Sensor	5490 Wired Remote Outdoor Sensor
7490 Wireless Remote Outdoor Sensor	5970 Universal Thermostat Guard

FREE Contractor Branding Available! Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.