

**TRADELINE**


# R8184G Protectorelay Oil Primary Addendum

The R8184G4082 (45 sec.) and R8184G4090 (15 sec.) are equipped with dry contacts for remote alarm. When the safety switch opens, the alarm switch contacts close to initiate alarm. The alarm contact rating is 25 VA at

24 V, 50/60 Hz.

Follow the instructions provided in 69-0617—1 for installation and checkout. Wire the control system as shown in Fig. 1.

**Fig. 1—Typical hookup for TRADELINE R8184G4082 and R8184G4090.**

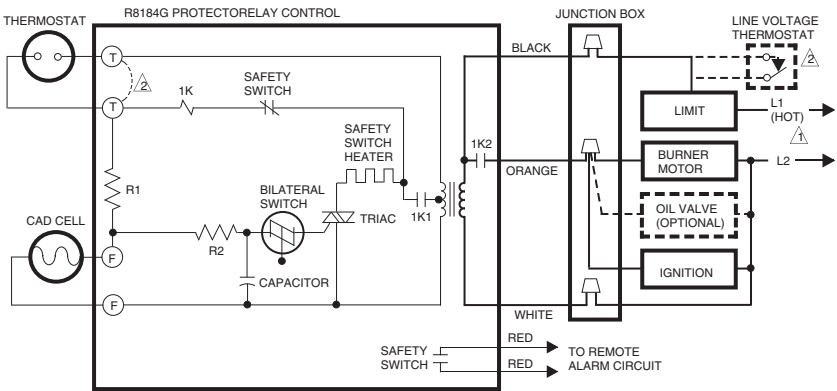

⚠ POWER SUPPLY. PROVIDE DISCONNECT MEANS AND OVERLOAD PROTECTION AS REQUIRED.

⚠ TO USE R8184 WITH LINE VOLTAGE CONTROLLER, JUMPER T-T TERMINALS AND CONNECT LINE VOLTAGE THERMOSTAT IN SERIES WITH LIMIT CONTROLLER.

M5172

# Honeywell

**Home and Building Control**  
Honeywell Inc.  
1985 Douglas Drive North  
Golden Valley, Minnesota 55422

**Home and Building Control**  
Honeywell Limited—Honeywell Limitée  
740 Ellesmere Road  
Scarborough, Ontario  
M1P 2V9

Helping You Control Your World



