

WALL THERMOSTAT GUARDS

190 THERMOSTAT GUARD KITS


The 190 Series Thermostat Guard Kits are designed to give complete enclosure protection to the thermostat. They have air circulating ports on all four sides to ensure ample air circulation for proper thermostat operation. Each guard has a permanently attached eight-tumbler type lock, and each kit is supplied with a key. Key design permits use of a single key or multiple installations. Extra keys are available separately – order **40-857**.

Guard kits are available with two mounting base types: solid or ring (see ordering chart). When using the ring base models, the guard can be mounted to the wall without removing the thermostat. Models are available with transparent or opaque covers – see ordering chart.



40-857

Key for use with all 190 Series Thermostat Guards.

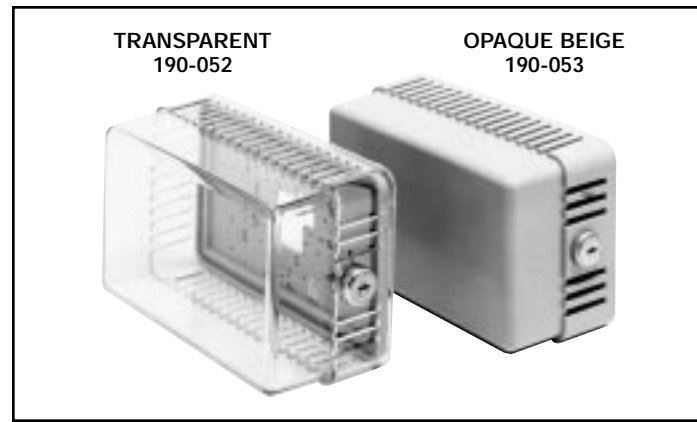

**TRANSPARENT
190-052**

**OPAQUE BEIGE
190-053**

ORDERING DATA

UNI-LINE ORDER NO.	MODEL NUMBER	COVER SHAPE	COVER DIMENSIONS (INSIDE)	COVER MATERIAL		BASE TYPE	
				TRANSPARENT	OPAQUE	SOLID	RING
190-050	BTG-K	SQUARE	SOLID – 5-1/4" (L) X 4-5/8" (W) X 3-1/4" (D)	•		•	•
190-051	BTG-O		RING – 5-1/4" (L) X 4-5/8" (W) X 3-1/4" (D)		•	•	•
190-052	BTG-RK	RECTANGLE	SOLID – 6-1/4" (L) X 3-1/2" (W) X 3-1/4" (D)	•		•	•
190-053	BTG-RO		RING – 6-3/8" (L) X 3-1/2" (W) X 3-1/4" (D)		•	•	•
190-054	BTG-EK	SQUARE	SOLID – 3-7/8" (L) X 3-1/2" (W) X 2-1/2" (D)	•		•	•
190-055	BTG-EO		RING – 3-7/8" (L) X 3-1/2" (W) X 2-1/2" (D)		•	•	•
190-068	BTG-UK	RECTANGLE	SOLID – 8-1/4" (L) X 5" (W) X 3-1/2" (D)	•		•	•
190-069	BTG-UO		RING – 7-1/8" (L) X 4-5/8" (W) X 3-5/8" (D)		•	•	•
190-056	BTG-DK	RECTANGLE	SOLID – 4-1/4" (L) X 7-5/8" (W) X 2-1/8" (D)	•		•	•
190-057	BTG-DO		RING – 4-1/8" (L) X 7-1/16" (W) X 2-1/4" (D)		•	•	•
190-072	BTG-UB2	RECTANGLE	SOLID – 8-1/4" (L) X 5-3/8" (W) X 3-1/2" (D)	TRANSPARENT	BRONZE	•	•
190-073	BTG-RB		RING – 8-1/8" (L) X 4-5/8" (W) X 3-5/8" (D)			•	•
			SOLID – 6-3/8" (L) X 3-1/2" (W) X 3" (D)			•	•
			RING – 6-3/8" (L) X 3-1/2" (W) X 1/4" (D)			•	•

Ring base models will mount over thermostat without having to remove the thermostat. No rewiring is necessary.

190 METAL THERMOSTAT GUARD KITS

The 190 Series Thermostat Guard Kits are made of 18/22 gauge steel with baked enamel finish. They have air circulating ports on all four sides to ensure ample air circulation for proper thermostat operation. Each guard has a permanently attached eight-tumbler type lock and each kit is supplied with a key. Key design permits use of a single key on multiple installations. Extra keys are available separately – order **40-857**.

Guard kits are available with two mounting base types: solid or ring (see ordering chart). When using the ring base models the guard can be mounted to the wall without removing the thermostat.


MOUNTING BASE TYPES



SOLID BASE



RING BASE

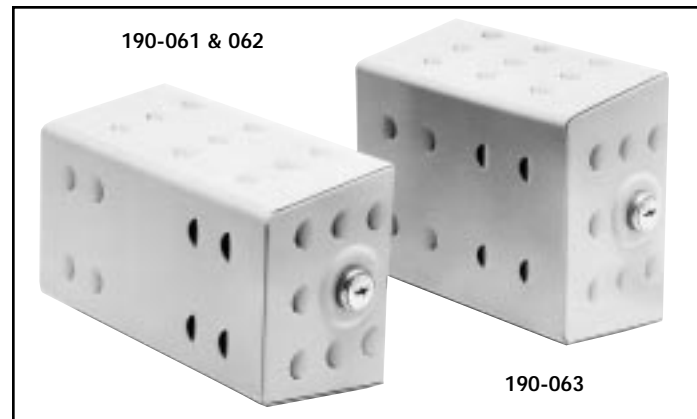

190-061 & 062

190-063

ORDERING DATA

UNI-LINE ORDER NO.	MODEL NUMBER	COVER SHAPE	COVER DIMENSIONS (INSIDE)	BASE TYPE		BASE MATERIAL	
				SOLID	RING	PLASTIC	METAL
190-060	BTG-EM	SQUARE	3-7/8" (L) X 3-1/2" (W) X 2-1/2" (D)	•		•	
190-061	BTG-RM	RECTANGLE	6-3/8" (L) X 3-1/2" (W) X 3" (D)	•		•	
190-062	BTG-RWM		6-3/8" (L) X 3-1/2" (W) X 3-1/4" (D)		•	•	
190-063	BTG-KM	SQUARE	5-1/4" (L) X 4-5/8" (W) X 3" (D)	•		•	
190-064	BTG-KWM		5-1/4" (L) X 4-5/8" (W) X 3" (D)		•	•	
190-065	BTG-54-VL	RECTANGLE	6-1/4" (L) X 4-3/4" (W) X 3" (D)	•			•
190-067	BTG-54-VLW		6" (L) X 3-11/16" (W) X 3-1/8" (D)		•		•
190-070	BTG-UM		7-1/4" (L) X 5-3/8" (W) X 3-1/2" (D)	•			•
190-071	BTG-UWM		6-3/8" (L) X 4-1/2" (W) X 3-9/16" (D)		•		•
190-074†	BTG-UWM-1		9-3/8" (L) X 6-3/4" (W) X 3" (D)		•		•

Ring base models will mount over thermostat without having to remove the thermostat. No wiring or rewiring necessary.

† Designer White