



iO-TGL Thermostat Guard Specification and Installation Sheet

iO-TGL-KEY

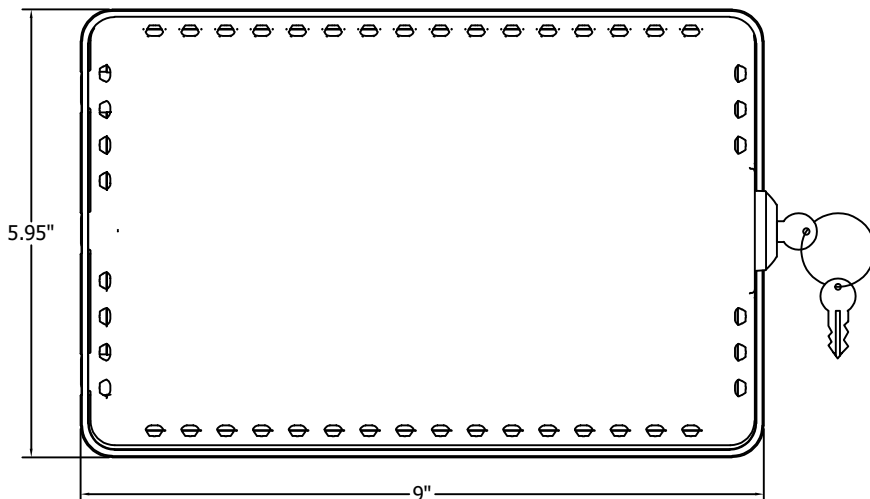

iO-TGL-COMBO

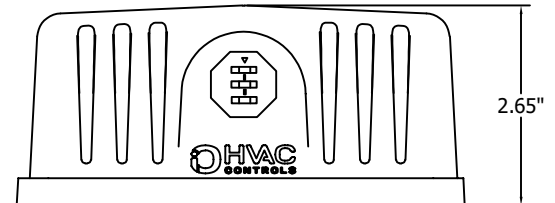

Application:

The iO-TGL Thermostat Guard is meant to protect a wall-mounted thermostat from impact and tampering. It is made of a transparent material that maintains high visibility of the thermostat display while being tough and highly resilient. The iO-TGL is available with either a key (iO-TGL-KEY) or combination (iO-TGL-COMBO) lock.

Construction:

Tritan copolyester body
Zinc-plated steel lock

Installing The Thermostat Guard:

Locate the Thermostat Guard around your wall thermostat. Unlock the Thermostat Guard and remove the cover from the base. Secure the base to the wall with the 4 included screws. Reattach the cover and lock the Thermostat Guard.

To reset the combination for the iO-TGL-COMBO, start by unlocking the Thermostat Guard. Locate the hole on the top of the lock dial. Using a paperclip, press and hold the button. Rotate the dials to your new combination, then release the button. Your new combination is now set and can be reset using the same method.

If you have lost your key for the iO-TGL-KEY, please contact iO HVAC Controls.