



Product Description

The Functional Devices, Inc.™ RIBMN24C is a low cost, track-mounted, general purpose relay. It is provided with double-back taped snap track for fast easy mounting. The LED indicates when the relay is energized.



Product Specifications

Type: One (1) SPDT Continuous Duty Coil
Expected Life: 10 million cycles minimum mechanical
Operating Temp.: -30 to 140°F
Humidity Range: 5 to 95% (non-condensing)
Operate Time: 6mS
Relay Status: LED On = Activated
Dimensions: 1.10" x 2.75" x 1.75"
Approvals: UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
Gold Flash: No



Contact Ratings:

15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc N/C
 7 Amp Resistive @ 30 Vdc N/O
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 C300 Pilot Duty


Coil Current:

26 mA @ 20 Vac	14 mA @ 20 Vdc
31 mA @ 24 Vac	18 mA @ 24 Vdc
48 mA @ 35 Vac	28 mA @ 35 Vdc

Coil Voltage Input:

24 Vac/dc; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull in = 20 Vac / 20 Vdc

Product Wiring

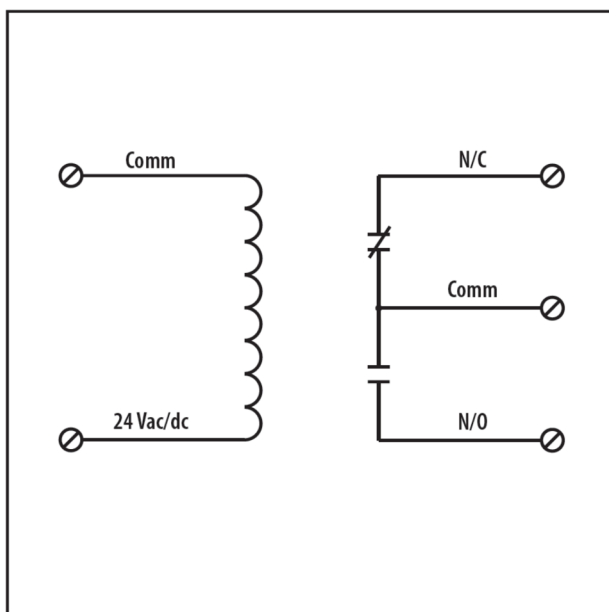

Specifications are subject to change without notice.

Functional Devices, Inc. is a trademark of Functional Devices, Inc. RIB is a registered trademark of Functional Devices, Inc.