



## ACS-2 & 3 IN-PAN CONDENSATE OVERFLOW DETECTION SWITCHES

### APPLICATIONS

- The ACS-2 & 3 Condensate Overflow Switches install in air conditioner drain pan to shut off the unit if condensate level approaches overflow.

### FEATURES

- Easy to install, inspect and maintain
- Compact design mounts to side of A/C condensate drain pans
- Can be installed to activate audible or visual alarm circuitry
- ABS housing and float
- Complies with applicable building codes
- Switches can be wired to operate as NO or NC
- Operation:
  - ACS-2 — 48 VAC/DC max, 5 amps max
  - ACS-3 — 125-250 VAC max, 11 amps max, up to 1/3 HP
- Lead wires:
  - ACS-2 — 18" and 72" leads
  - ACS-3 — 72" leads




### SERIES SPECIFICATIONS

Item No.	Model	Volts	Amps	Lead Wires	Weight lbs (kg)
599122	ACS-2	48 V AC/DC	5 max.	18" (45.7 cm)	0.21 (0.10 Kg)
599123	ACS-2	48 V AC/DC	5 max.	72" (182.9 cm)	0.29 (0.13 Kg)
599124	ACS-3	125-250 VAC	11 max.	72" (182.9 cm)	0.29 (0.13 Kg)

# ACS-2 & 3 IN-PAN CONDENSATE OVERFLOW DETECTION SWITCHES

## ENGINEERING DATA

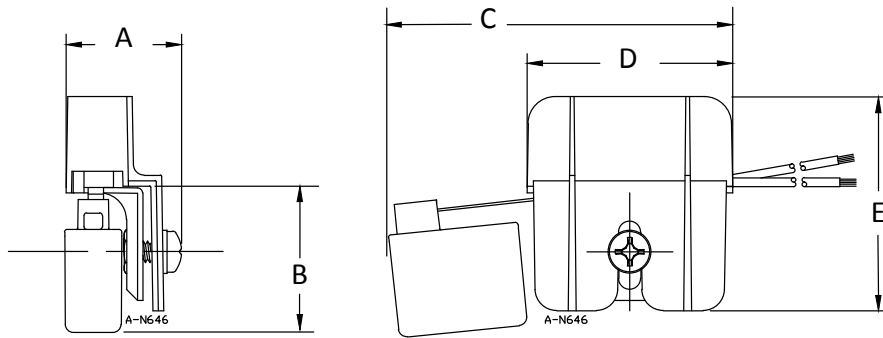

SIDE VIEW

BACK VIEW

A	B	C	D	E
1.34" (3.40 cm)	1.9" (4.83 cm)	2.4" (6.1 cm)	2.5" (6.35 cm)	2.5" (6.35 cm)

## TYPICAL INSTALLATION

