


The Twinning Kit is designed to allow a single thermostat to control two identical HVAC units. It can also be expanded to control 6 identical HVAC units with one thermostat. The iO-TWIN-TR can be used on common or separate ducted systems with single-stage, multi-stage or heat pump equipment. Uses standard 18-gauge thermostat wire. Thermostats and HVAC units can be located up to 300' from the twinning kit panel. Kit includes control panel and 20VA transformer. The control panel only is available separately (iO-TWIN). Metal Enclosure (iO-PAN-ME) available as an additional option on iO Zone Panels.

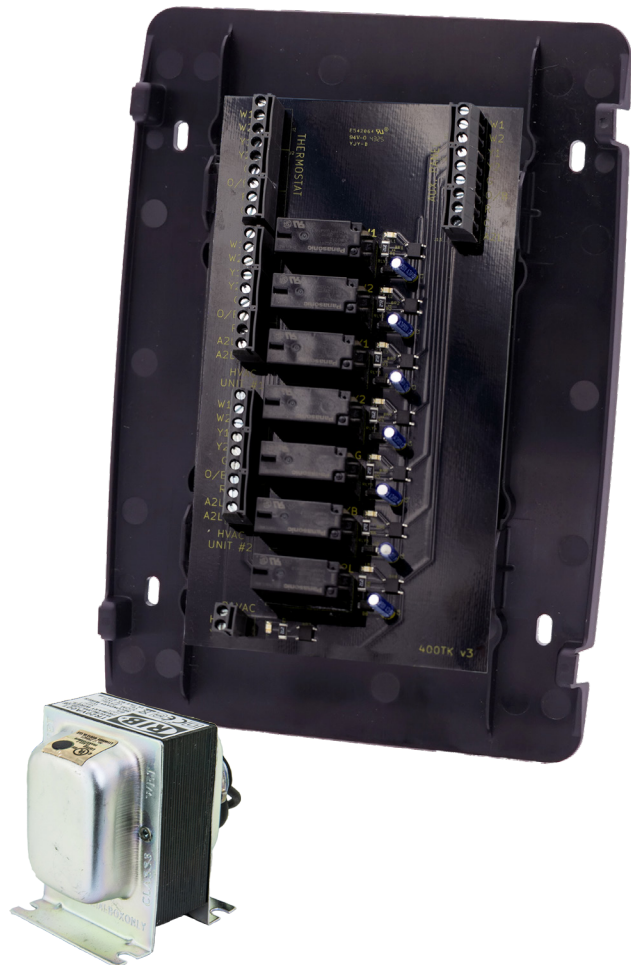

Features and Benefits:

- Easy to install and setup
- Uses standard 18-gauge thermostat wire
- Optional control of up to six units
- Reduces installation time and cost
- A2L Compatible and ready
- Can be used with the Lead/Lag Controller

Warranty:

- 5 Years

Specifications:

Mounting	Plastic back plate with mounting holes
Dimensions	8.00" Height x 6.00" Width x 1.50" Depth
Input Voltage	24VAC

BOARD DIAGRAM

